

**Color Variants**  
**CE261114**  
**Stainless steel frame**  
**Width 60 cm**

**CE261114**  
**Glass ceramic cooktop 200 series**  
**Stainless steel frame**  
**Width 60 cm**

Sturdy stainless steel frame  
 Sensor control with direct selection of output level

**Cooking zones**

1 Super-Quick cooking zone ø 17 cm (1800 W), switches to 17 x 26,5 cm (2600 W) roasting zone.  
 1 Super-Quick cooking zone ø 14,5 cm (1200 W), converts to ø 21 cm (2100 W, with booster function 3000 W) cooking zone.  
 1 Super-Quick cooking zone ø 18 cm (2000 W).  
 1 Super-Quick cooking zone ø 14,5 cm (1200 W).

**Handling**

Sensor control with direct selection of output level.  
 Cooking zone marking.  
 Electronic power control in 17 output levels.

**Features**

Booster function.  
 Cooking timer for up to 99 minutes.  
 Short-term timer.  
 Options menu.

**Safety**

Main switch.  
 Operation indicator.  
 2-stage residual heat indication.  
 Child lock.  
 Safety shut-off.

**Planning notes**

Immersion depth 49 mm, depth at plug socket 50 mm.  
 Under the plug socket, a 10 mm clearance must be observed from side panels or from intermediate shelf.  
 The cooktop must be freely accessible from underneath to be able to detach the cooktop's base in a downward direction.  
 Installation possible in a 60 cm wide lower cabinet.  
 Appliance must be fixed from underneath.  
 Cooktop clamping range: 20 - 50 mm.  
 Appliance weight: approx. 8 kg.

**Connection**

Total connected load 8.3 KW.  
 Plan a connection cable.

**Characteristics**

**Product name/family**  
 Cooking zone ceramic

**Construction type**  
 Built-in

**Energy input**  
 Electric

**Total number of positions that can be used at the same time**  
 4

**Type of control setting devices**  
 Min. required niche size for installation (HxWxD)  
 49 x 560-560 x 490-490

**Width of the appliance**  
 590

**Dimensions**  
 49 x 590 x 520

**Dimensions of the packed product (HxWxD)**  
 100 x 750 x 590

**Net weight**  
 8.3

**Gross weight**  
 9.1

**Residual heat indicator**  
 Separate

**Location of control panel**  
 Hob front

**Type of external control possibility**  
 Basic surface material  
 Ceramic

**Color of surface**  
 Black, Stainless steel

**Color of frame**  
 Stainless steel

**Length electrical supply cord**

**Knob Material**

**Sealed Burners**  
 No

**heating with booster**  
 Front right

**Type of pan support**

**Natural Gas Connection Rating**

**LP Gas Connection Rating**

**Dimension of 1st heating element (in)**  
**Power of heating element (kW)**  
 2

**Power of 1st burner**

**Dimension of 2nd heating element (in)**  
**Power of 2nd heating element (kW)**

**Power of 2nd burner**

**Dimension of 3rd heating element (in)**  
**Power of 3rd heating element (kW)**  
 1.8 ; 2.6

**Power of 3rd burner**

**Dimension of 4th heating element (in)**  
**Power of 4th heating element (kW)**

**Power of 4th burner**

**Dimension of 5th heating element (in)**  
**Power of 5th heating element (kW)**  
 1.2

**Power of 5th burner**

**Dimension of 6th heating element (in)**  
**Power of heating element (kW in boost)**

**Power of 3rd heating element (kW in boost)**

**Power of 4th heating element (kW in boost)**

**Power of 5th heating element (kW in boost)**

**Power of 6th heating element (kW in boost)**

**Connection rating**  
 8300

**Gas connection rating**

**Fuse protection**

**Voltage**  
 220-240

**Frequency**  
 50

**Universal Product Code**

**Main colour of product**  
 Black


**Energy input**  
 Electric

**Gas type**

**Alternative gas type**

**Length of electrical supply cord (in)**

**Plug type**

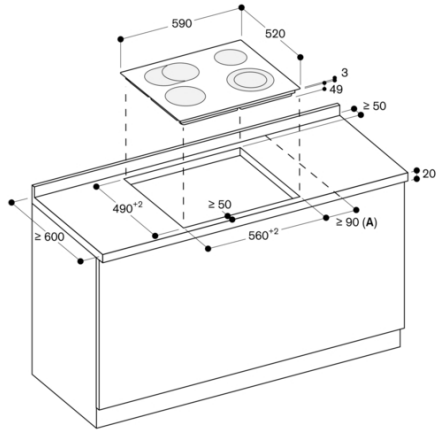

A: Minimum distance from the hob cut-out to the wall.  
measurements in mm